



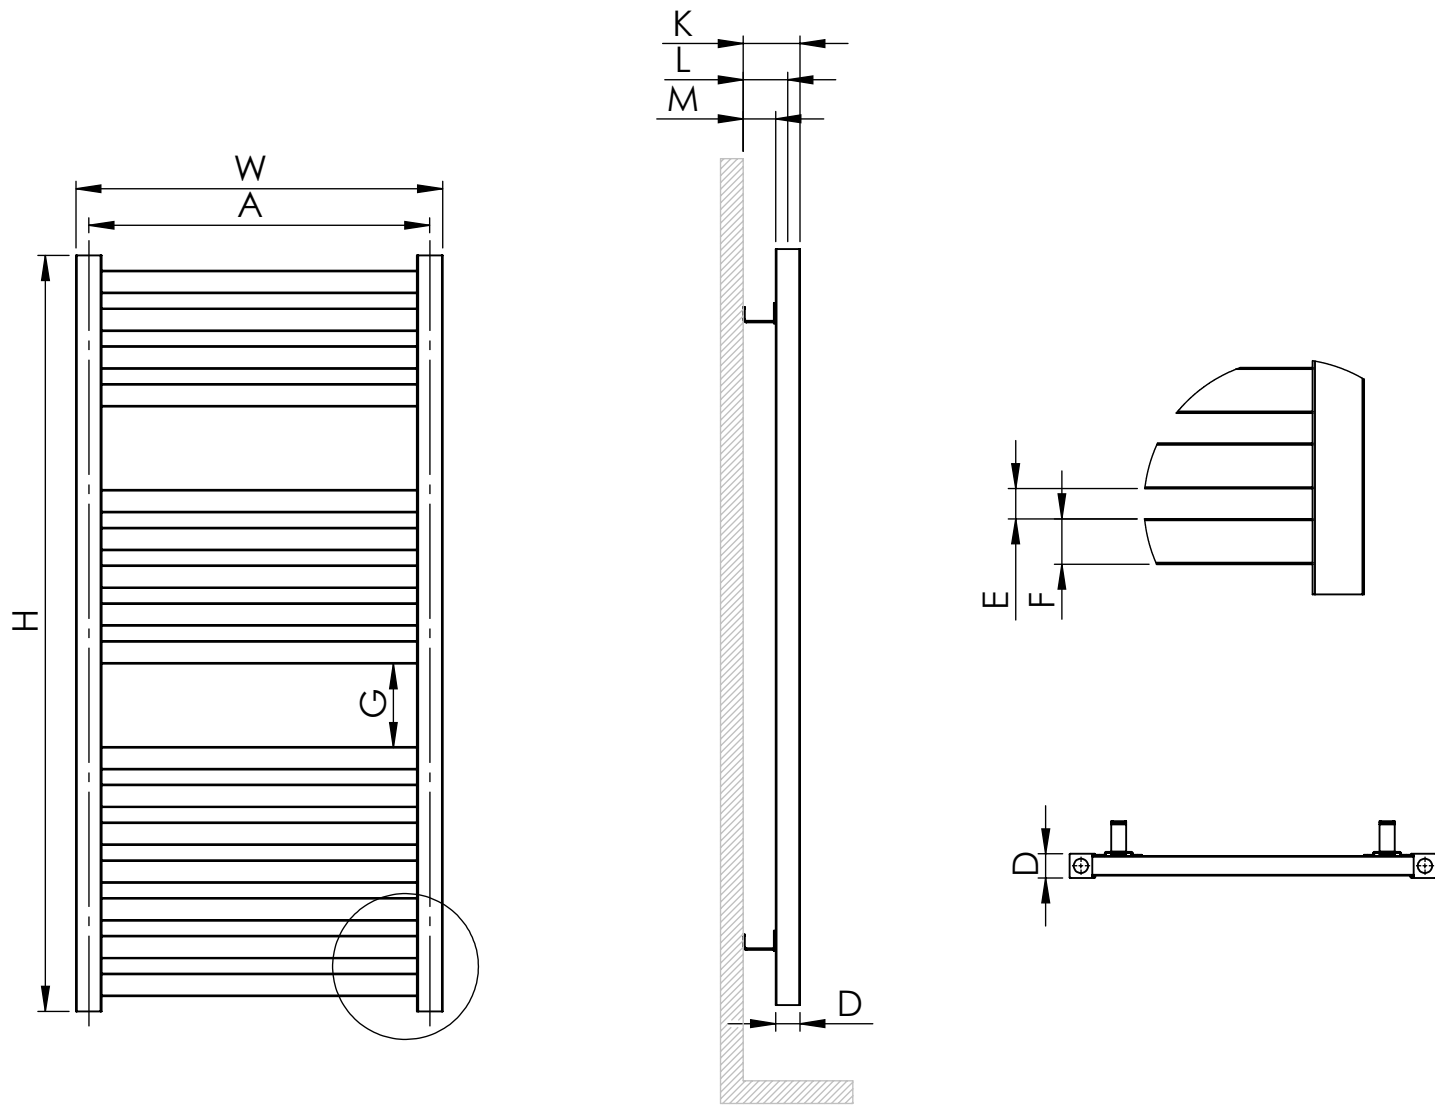

Connection Types



Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	G Space Between Two Groups (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output ΔT=30 °C (Watt)	Heat Output ΔT=50 °C (Watt)	Heat Output ΔT=60 °C (Watt)	Heat Output ΔT=70 °C (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Benoit 300	6 (3+3)	300	700	285	43	90	5	120	82	51	38	124	246	320	384	1310	4,25	4,98	0,40	0,02	800 x 540 x 55
	9 (3+3+3)	300	1100	285	43	90	5	120	82	51	38	189	375	488	585	1995	6,41	7,48	0,62	0,04	1200 x 540 x 55
	12 (3+3+3+3)	300	1500	285	43	90	5	120	82	51	38	255	505	657	788	2688	8,56	10,23	0,85	0,06	1600 x 640 x 55
Benoit 400	6 (3+3)	400	700	385	43	90	5	120	82	51	38	165	326	424	509	1736	4,94	5,80	0,40	0,03	800 x 640 x 55
	9 (3+3+3)	400	1100	385	43	90	5	120	82	51	38	250	496	645	774	2640	7,44	8,70	0,62	0,04	1200 x 640 x 55
	12 (3+3+3+3)	400	1500	385	43	90	5	120	82	51	38	336	666	866	1039	3543	9,94	10,97	0,85	0,05	1600 x 340 x 85
Benoit 500	6 (3+3)	500	700	485	43	90	5	120	82	51	38	207	410	533	640	2183	5,63	6,16	0,40	0,02	800 x 340 x 85
	9 (3+3+3)	500	1100	485	43	90	5	120	82	51	38	314	622	809	971	3312	8,47	9,25	0,62	0,03	1200 x 340 x 85
	12 (3+3+3+3)	500	1500	485	43	90	5	120	82	51	38	420	834	1085	1302	4440	11,31	12,59	0,85	0,06	1600 x 440 x 85
Benoit 600	6 (3+3)	600	700	585	43	90	5	120	82	51	38	251	497	647	776	2647	6,32	6,98	0,40	0,03	800 x 440 x 85
	9 (3+3+3)	600	1100	585	43	90	5	120	82	51	38	379	753	979	1175	4007	9,50	10,47	0,62	0,04	1200 x 440 x 85
	12 (3+3+3+3)	600	1500	585	43	90	5	120	82	51	38	508	1009	1312	1575	5371	12,69	14,21	0,85	0,07	1600 x 540 x 85