

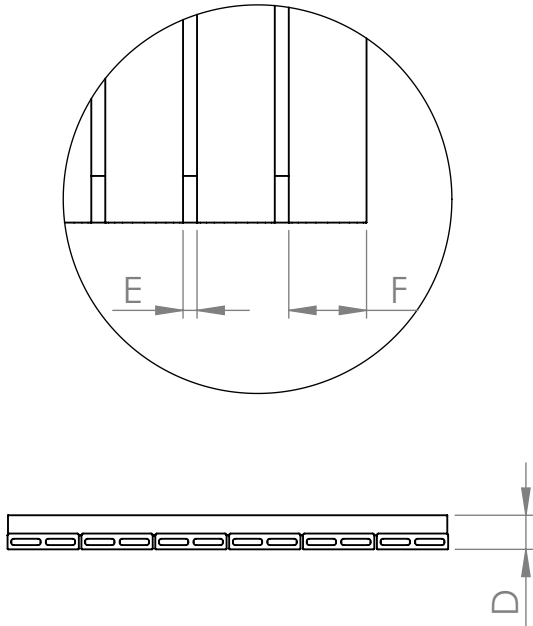


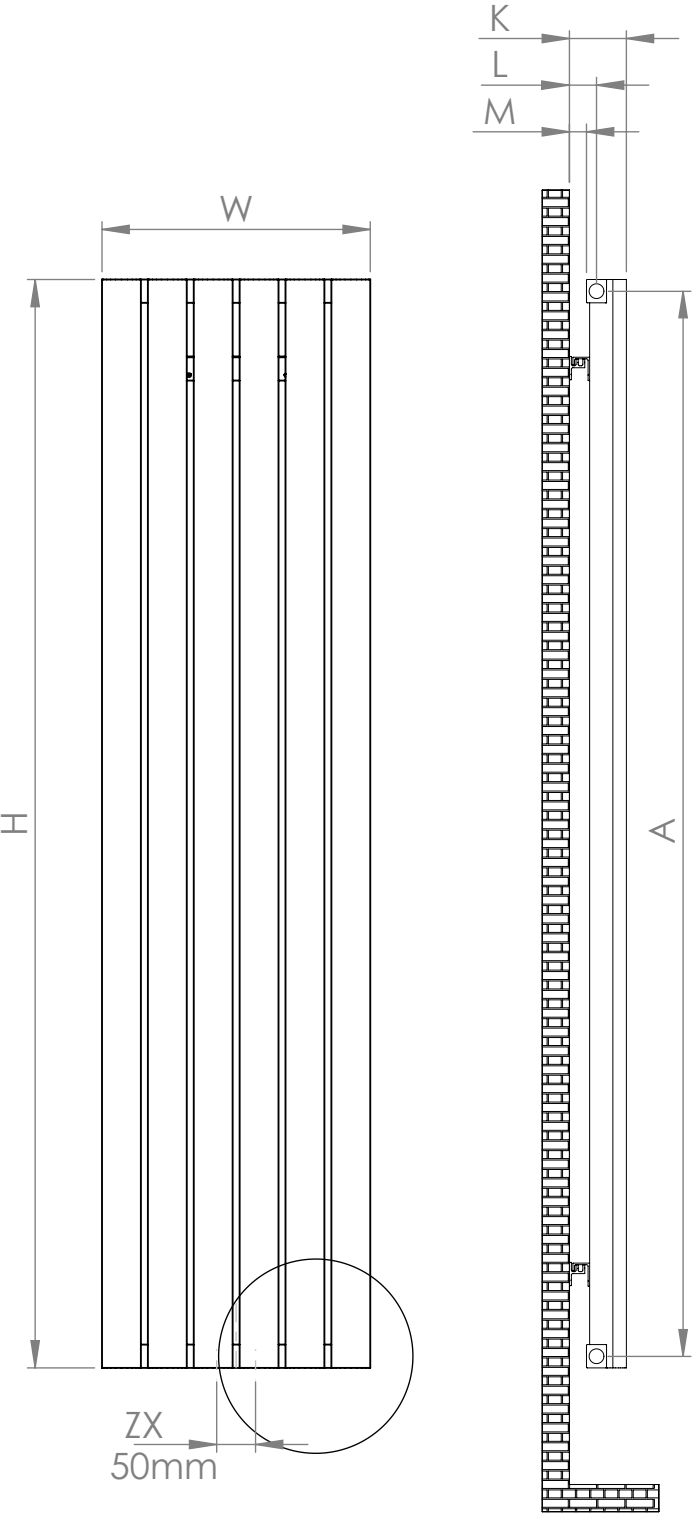

Connection Types



Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output ΔT=30 °C (Watt)	Heat Output ΔT=50 °C (Watt)	Heat Output ΔT=60 °C (Watt)	Heat Output ΔT=70 °C (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Kalsedon 280	3	280	300	245	43	90	5	65-74	35-44	22-31	43	111	144	173	590	1,81	2,68	0,28	0,01	390X315X78
	3	280	400	345	43	90	5	65-74	35-44	22-31	58	151	196	236	803	2,16	3,11	0,32	0,02	490X315X78
	3	280	500	445	43	90	5	65-74	35-44	22-31	75	193	251	301	1026	2,50	3,55	0,37	0,02	590X315X78
	3	280	600	545	43	90	5	65-74	35-44	22-31	92	237	308	369	1259	2,85	3,98	0,41	0,02	690X315X78
	3	280	700	645	43	90	5	65-74	35-44	22-31	105	270	351	421	1437	3,19	4,40	0,45	0,02	790X315X78
	3	280	800	745	43	90	5	65-74	35-44	22-31	117	302	393	471	1607	3,54	4,84	0,50	0,03	890X315X78
	3	280	900	845	43	90	5	65-74	35-44	22-31	129	332	432	519	1769	3,88	5,27	0,54	0,03	990X315X78
	3	280	1000	945	43	90	5	65-74	35-44	22-31	140	361	470	564	1923	4,22	5,70	0,58	0,03	1090X315X78
	3	280	1200	1145	43	90	5	65-74	35-44	22-31	161	415	540	647	2208	4,91	6,55	0,67	0,04	1290X315X78
	3	280	1400	1345	43	90	5	65-74	35-44	22-31	184	476	619	743	2535	5,60	7,41	0,75	0,04	1490X315X78
Kalsedon 280	3	280	1600	1545	43	90	5	65-74	35-44	22-31	212	547	711	853	2910	6,27	8,26	0,84	0,05	1690X315X78
	3	280	1800	1745	43	90	5	65-74	35-44	22-31	243	628	817	980	3341	6,96	9,08	0,92	0,05	1890X315X78