



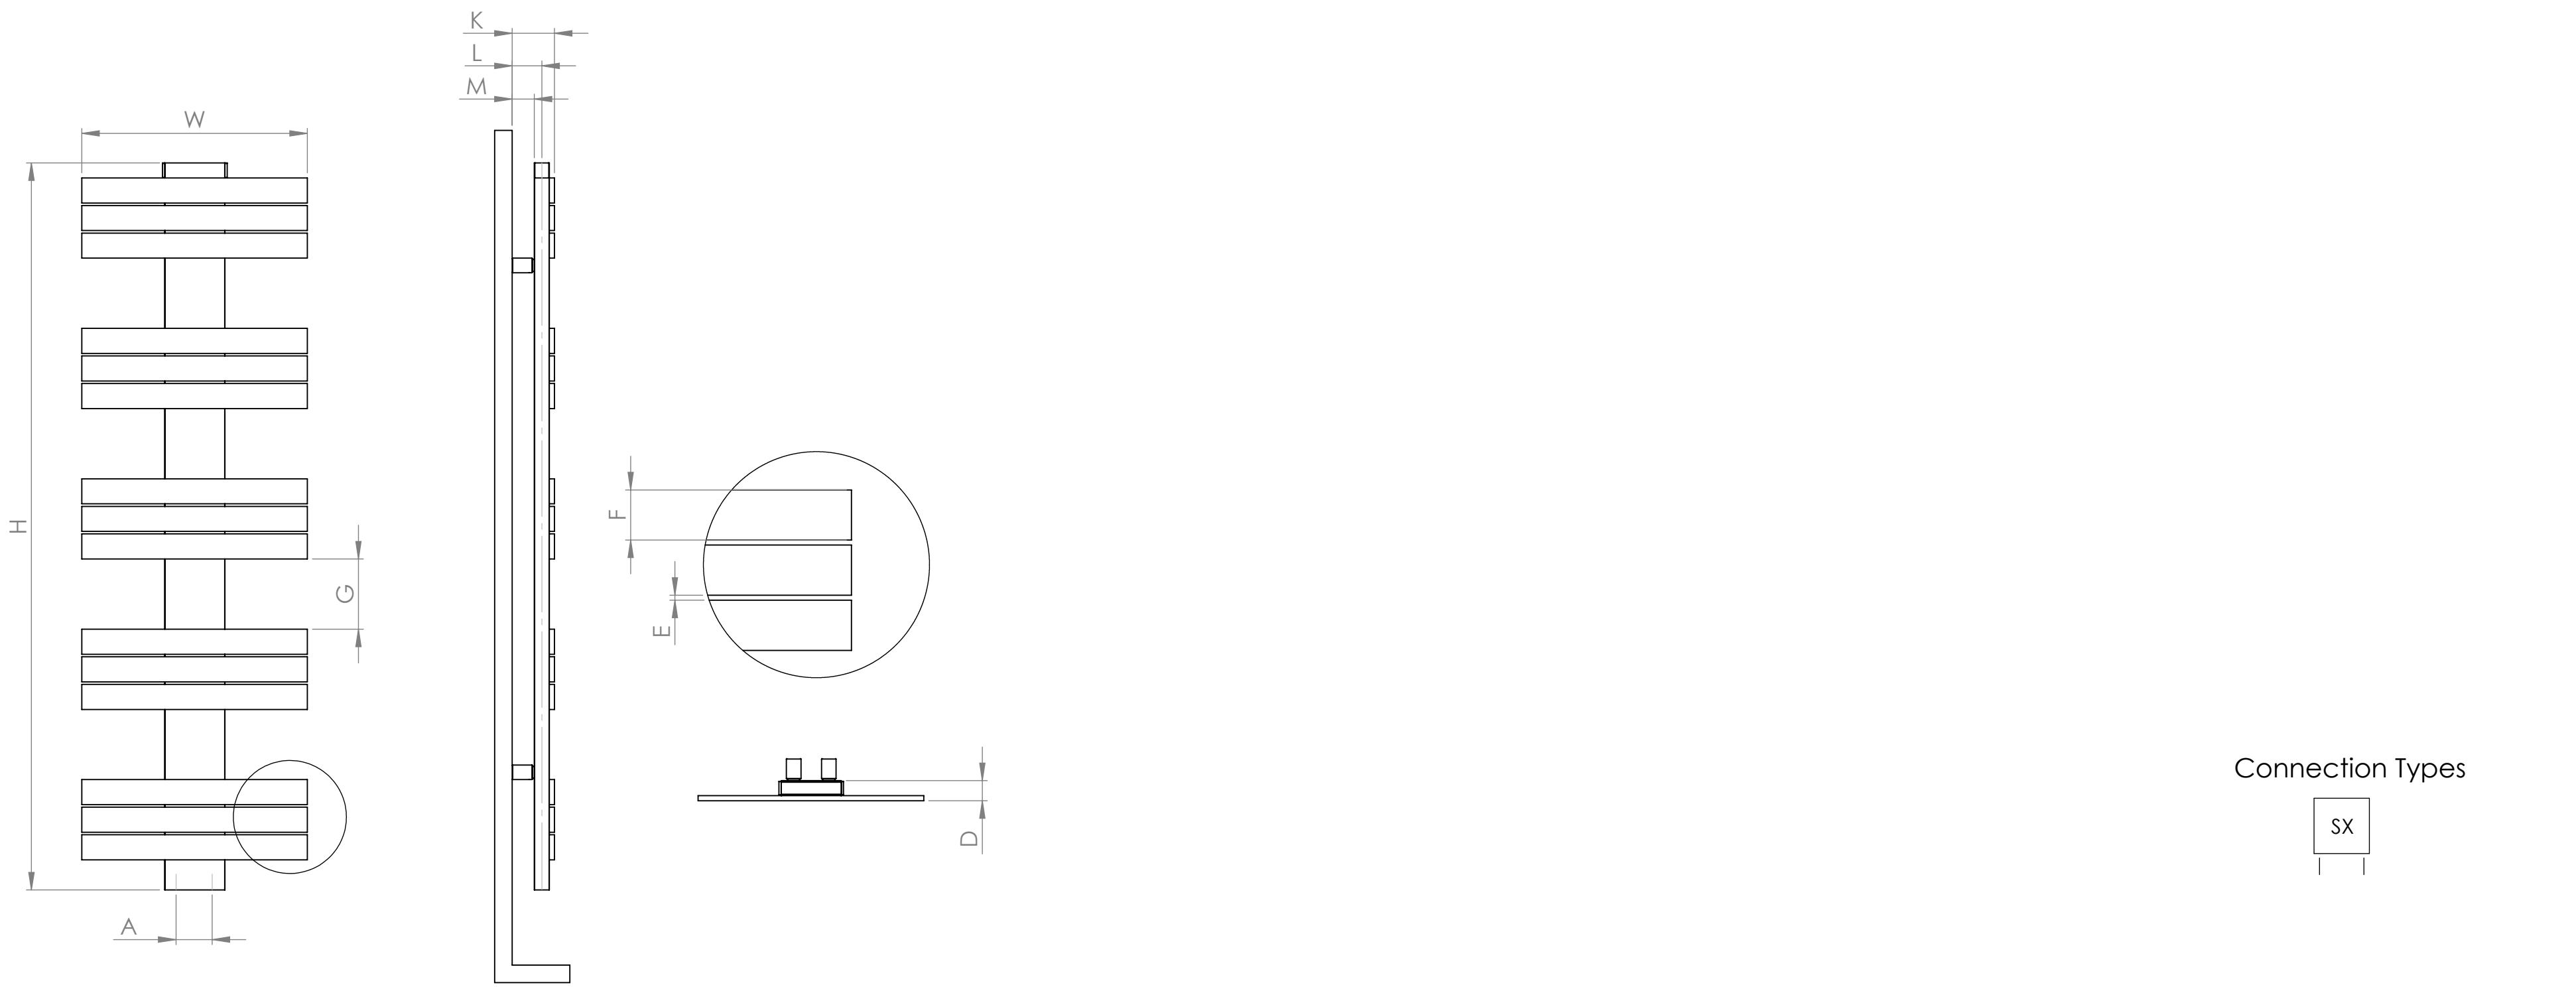

Connection Types



Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	G Space Between Two Groups (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output ΔT=30 °C (Watt)	Heat Output ΔT=50 °C (Watt)	Heat Output ΔT=60 °C (Watt)	Heat Output ΔT=70 °C (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Ida 600	4 (2+2)	600	400	50	40	50	5	100	83-108	58-83	43-68	89	175	228	273	931	5,00	5,55	0,22	0,02	500 x 640 x 55
	6 (2+2+2)	600	605	50	40	50	5	100	83-108	58-83	43-68	134	264	344	412	1405	7,28	8,05	0,32	0,02	705 x 640 x 55
	8 (2+2+2+2)	600	810	50	40	50	5	100	83-108	58-83	43-68	178	353	459	551	1879	9,57	10,54	0,42	0,03	910 x 640 x 55
	10 (2+2+3+3+3)	600	1015	50	40	50	5	100	83-108	58-83	43-68	223	442	575	690	2353	11,86	13,04	0,52	0,04	1115 x 640 x 55
	12 (2+2+3+3+3+3)	600	1220	50	40	50	5	100	83-108	58-83	43-68	126	249	324	389	1327	14,15	15,53	0,61	0,05	1320 x 640 x 55
	14 (2+2+2+2+2+2+2)	600	1425	50	40	50	5	100	83-108	58-83	43-68	312	620	806	968	3301	16,44	18,03	0,71	0,05	1525 x 640 x 55