



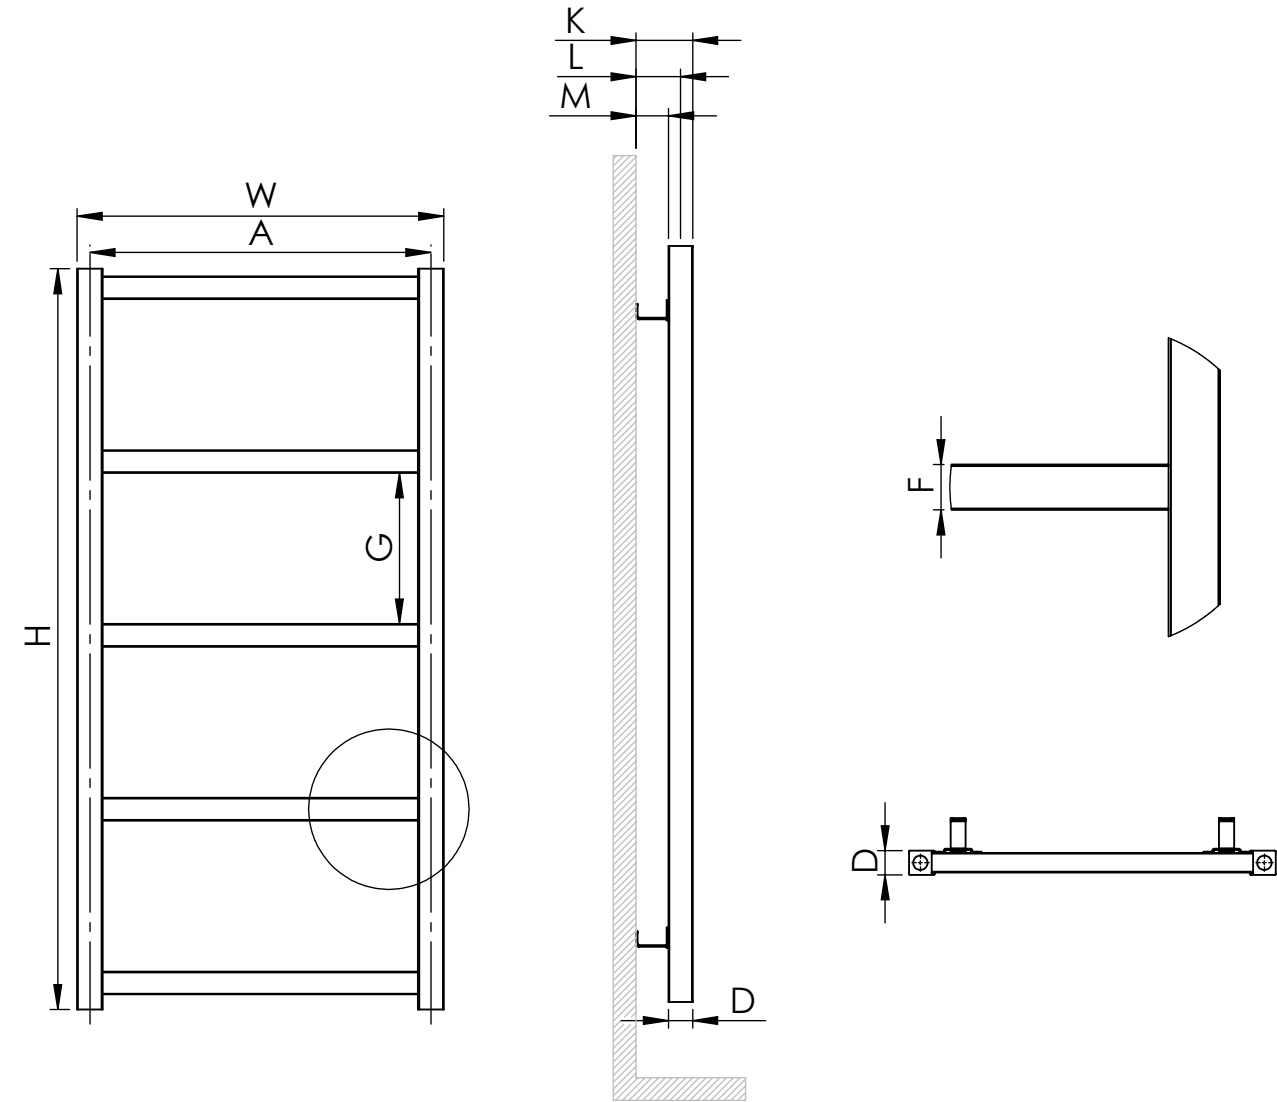

Connection Types



Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	G Space Between Two Groups (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output ΔT=30 °C (Watt)	Heat Output ΔT=50 °C (Watt)	Heat Output ΔT=60 °C (Watt)	Heat Output ΔT=70 °C (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Tianna Line 300	3 (1+1+1)	300	1000	285	80	60	260	N/A	105-114	55-64	26-35	114	225	293	351	1197	4,43	5,20	0,57	0,05	1100 x 340 x 110
	4 (1+1+1+1)	300	1300	285	80	60	253	N/A	105-114	55-64	26-35	149	295	384	461	1573	5,73	6,70	0,74	0,06	1400 x 340 x 110
	5 (1+1+1+1+1)	300	1600	285	80	60	250	N/A	105-114	55-64	26-35	184	365	475	570	1944	7,02	8,19	0,91	0,07	1700 x 340 x 110
	6 (1+1+1+1+1+1)	300	1900	285	80	60	248	N/A	105-114	55-64	26-35	220	435	566	679	2316	8,32	9,68	1,08	0,08	2000 x 340 x 110
Tianna Line 400	3 (1+1+1)	400	1000	385	80	60	260	N/A	105-114	55-64	26-35	133	263	342	411	1402	4,88	5,83	0,57	0,06	1100 x 440 x 110
	4 (1+1+1+1)	400	1300	385	80	60	253	N/A	105-114	55-64	26-35	175	346	450	540	1842	6,32	7,51	0,74	0,07	1400 x 440 x 110
	5 (1+1+1+1+1)	400	1600	385	80	60	250	N/A	105-114	55-64	26-35	216	429	558	670	2285	7,77	9,19	0,91	0,09	1700 x 440 x 110
	6 (1+1+1+1+1+1)	400	1900	385	80	60	248	N/A	105-114	55-64	26-35	258	512	666	799	2725	9,21	10,88	1,08	0,10	2000 x 440 x 110
Tianna Line 500	3 (1+1+1)	500	1000	485	80	60	260	N/A	105-114	55-64	26-35	153	303	394	473	1613	5,32	6,45	0,57	0,07	1100 x 540 x 110
	4 (1+1+1+1)	500	1300	485	80	60	253	N/A	105-114	55-64	26-35	201	399	519	623	2125	6,92	8,32	0,74	0,09	1400 x 540 x 110
	5 (1+1+1+1+1)	500	1600	485	80	60	250	N/A	105-114	55-64	26-35	250	495	644	773	2636	8,51	10,20	0,91	0,11	1700 x 540 x 110
	6 (1+1+1+1+1+1)	500	1900	485	80	60	248	N/A	105-114	55-64	26-35	298	591	769	922	3145	10,10	12,07	1,08	0,12	2000 x 540 x 110
Tianna Line 600	3 (1+1+1)	600	1000	585	80	60	260	N/A	105-114	55-64	26-35	174	344	448	537	1832	5,77	7,07	0,57	0,08	1100 x 640 x 110
	4 (1+1+1+1)	600	1300	585	80	60	253	N/A	105-114	55-64	26-35	229	454	591	709	2418	7,51	9,13	0,74	0,10	1400 x 640 x 110
	5 (1+1+1+1+1)	600	1600	585	80	60	250	N/A	105-114	55-64	26-35	285	564	734	880	3001	9,25	11,20	0,91	0,12	1700 x 640 x 110
	6 (1+1+1+1+1+1)	600	1900	585	80	60	248	N/A	105-114	55-64	26-35	340	674	877	1052	3588	10,99	13,27	1,08	0,15	2000 x 640 x 110